

# XDI

Power, reliability and top precision


Spreading width from 12 to 36(\*) m

(\*) with set of vanes for 36 m. spreading width


**New**




The XDI fertilizer spreaders are directed at professional operators and at third-party contractors in view of their high performance in the distribution of fertilizers on large stretches of land. The standard hopper has a loading volume of 1500 liters which can be increased to 3000 liters by simply adding, at any given time, an extension. The spreading diagrams supplied with the machine, enable the operator to regulate the working width and the fertilizer load for a spreading width of up to 36 m. The XDI fertilizer spreaders allow for normal spreading, late spreading (which is indispensable when it is necessary to fertilize areas where crops reach an impressive height) and the spreading of edges.

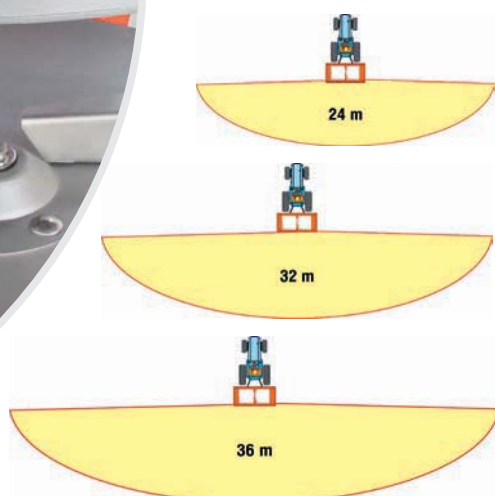


Spreading width: 24 m  
Fertilizer: KALI 49  
Variation coefficient: 8,1  
Quantity: 320 kg/ha

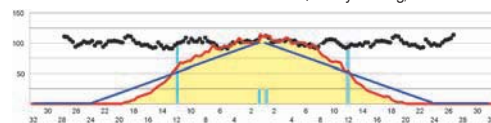

Spreading width: 32 m  
Fertilizer: NKP 18 - 4 - 14  
Variation coefficient: 8,6  
Quantity: 353,4 kg/ha

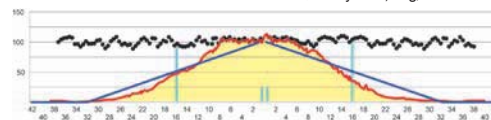

Spreading width: 36 m  
Fertilizer: NKP 18 - 4 - 14  
Variation coefficient: 8,9  
Quantity: 355,8 kg/ha

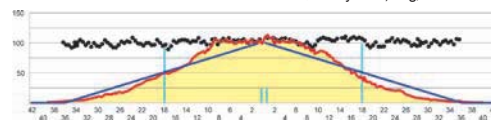

Models	Capacity (l)	Maximum load (kg)	Weight (kg)	Length (cm)	Hopper width (cm)	Height (cm)
XDI 1500	1.500	3.000	335	142	232	117
XDI 2000	2.000	3.000	360	151	242	130
XDI 3000	3.000	3.000	405	151	242	155

**All models are equipped with:** Manual fertilizer flow regulation – Double acting hydraulic drive for flow regulation – Standard filtering grids – PTO shaft – Inspection ladder – Stainless steel spreading discs – Stainless steel vanes for spreading up to 24/32 m – Vanes quick adjustment  
**OPTIONALS:** Computer for data management – Mobile focuser – Mud flap kit – Tarpaulin cover with full opening

# XDI

## Power, reliability and top precision

### Spreading width from 12 to 36(\*) m

(\*) with set of vanes for 36 m. spreading width



Photograph for illustration purposes - standard specifications may not match those shown.

- A professional spreader with large fertiliser capacity for pasture, cropping and broadacre applications
- Suitable for min 130-180hp tractors with Cat 2 three-point linkage with 1500kg to 3500kg lift capacity, 540 PTO and hydraulic remote
- Hopper with **Inspection ladder** in Painted or Stainless-Steel models
- Fertiliser grid in hopper prevents lumps blocking the gates and compromising flow and spreading uniformity
- **Ultra-slow (60 rpm) rotating horizontal agitators minimises fertiliser damage and powdering**
- **Stainless steel hopper base for long life**
- **Double acting hydraulic gates for On/Off control**
- **Stainless steel spreading discs driven by PTO**
- **Stainless steel vanes for spreading up to 32m (Optional vanes for up to 36m)**
- Quick & simple vane adjustment as per spreading tables for **Certified Spreading Performance**
- Stainless steel shields protect machine from broadcast fertiliser
- Optional rate controller and load cell system

XDI3000	<b>XDI 3000 (3000L/3000kg Capacity)</b>
KITTELXDI2	Tarpaulin cover
KITBORDXDI	Boundary Spreading Deflector
KITP360	Stainless Steel Vanes for spreading up to 36m (in lieu of standard)
30910001A	Spreading Computer
KITTUBXDI	Fertiliser Unloading Pipe
KITPARXDI	Stainless Steel Mud Flap Kit
KITP240VHW	Long Life Vanes (4 Years) 12-18m (in lieu of standard)
KITP320VHW	Long Life Vanes (4 Years) 12-32m (in lieu of standard)
KITP360VHW	Long Life Vanes (4 Years) 12-36m (in lieu of standard)

**DELMADE**  
*Shaping the Land*

DELMADE PTY LTD  
1800 335 623  
7 Roxford Avenue, Westbury, TAS, 7303  
info@delmade.com.au  
www.delmade.com.au