



Made in
Australia



BERENDS

Heavy Duty Grader Blade

“ Heavy duty
strength at a
light duty
price”

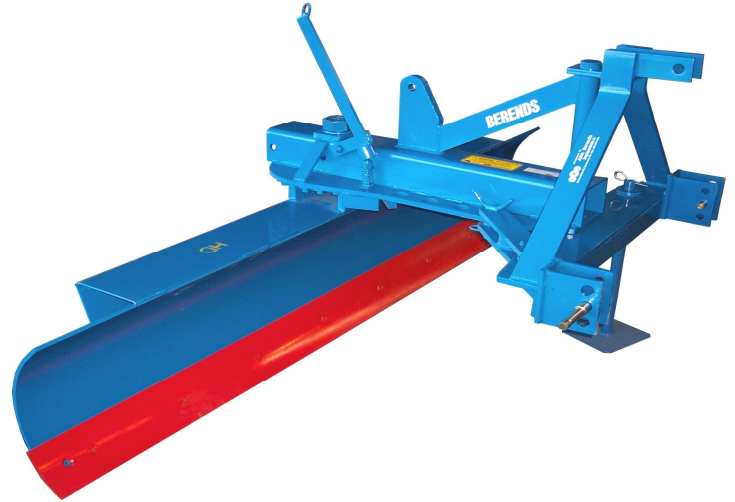

- Fitted with high tensile 50mm main pivot pin to minimize wear and avoid breakage.
- 24 angle positions with adjustment from the tractor seat.
- Offsets 4 positions to both right and left allowing blade to work outside the tractor wheel, even at an angle.
- Blade rotates 360° allowing forwards and backwards operation.
- Adequate tilt via the linkage pin position and tractor levelling box.
- Curved 10mm thick mouldboard for strong cuts at the correct angle and high clearance for greater capacity. Hardened, reversible cutting edges (as used on road graders).
- Optional Holden depth wheel (at additional cost) with either manual ratchet or hydraulic adjustment.
- Available in 6' (1.8m), 7' (2.1m) and 8' (2.4m) widths.
- 12 Month Warranty against faulty materials or workmanship.

Model	6' Model	7' Model	8' Model
Cutting edge width	6'	7'	8'
Mouldboard thickness	10mm	10mm	10mm
Mouldboard height	500mm	500mm	500mm
Tractor HP	40-100	40-100	40-100
Category—3 point linkage	Cat 1/2	Cat 1/2	Cat 1/2
Nett weight (kg)	305	350	370
No. offset positions	8	8	8
No. angle positions	24	24	24

DELMADÉ

206 Birralee Road, Westbury, Tas 7303
Freecall 1800 335 623 www.delmade.com.au