




12 MONTH WARRANTY

BERENDS PASTURE TOPPER

MADE IN AUSTRALIA

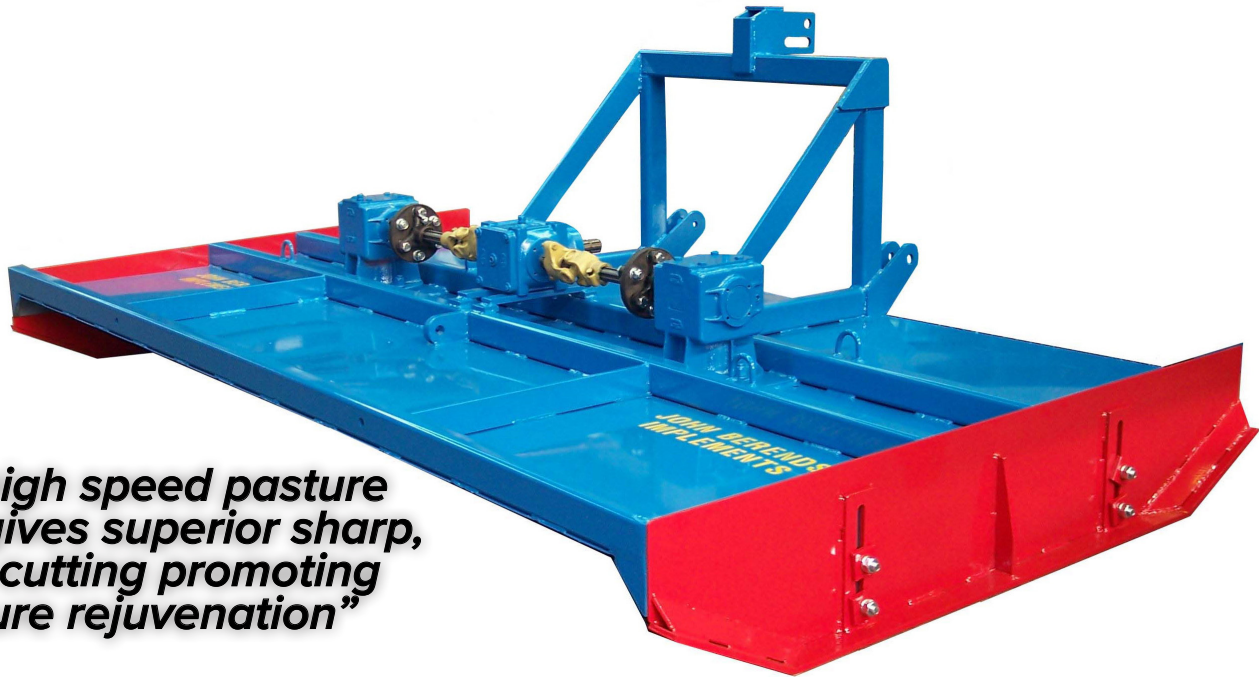

“The high speed pasture topper gives superior sharp, clean cutting promoting pasture rejuvenation”

FEATURES & BENEFITS

- Available in 10’ three-point linkage model only
- Twin rotors fitted to two 40HP and gearboxes and connected by a 75HP centre gearbox. Heavy Duty PTO fitted with two plate slip clutch
- Very high tip speed provides a cut rivaling many finishing mowers. Timed, deeply stepped twisted blades uplift pasture and allow the topper to evenly spread the cuttings.
- Adjustable skids allow easy cutting height adjustment. 14” Holden wheels are optional for depth control.
- Machine can be operated behind smaller tractors as topping is not high horsepower work.
- Fitted standard with front guards to prevent material being thrown forward over the tractor.
- Full 12 month warranty against faulty materials or workmanship.

PASTURE TOPPERS ARE DESIGNED SPECIFICALLY FOR TOPPING AND SHOULD NOT BE USED AS A SLASHER OR IN AREAS WHERE THEY MAY STRIKE STUMPS OR ROCKS OR SCALP THE GROUND

SPECIFICATIONS	10' - 3 Point Linkage
Cutting Width	2.90m
Cutting Height (with adjustable skids)	25-100mm
Weight	500kg
Length (Overall)	1.85m
Width (Overall)	3.12m
Headstock	Rigid/floating top link
Body Construction	3mm body, 6mm sides
Tractor HP range	35 HP+
PTO	Series 5 shaft with 2 plate slip clutch
Gearbox/PTO speed	540 rpm
Centre Gearbox	75 HP
End Gearbox	40HP
Gearbox Protection	Flexidrive rubber coupling systems with added shear-bolt protection

DELMADÉ

Shaping the Land

PTY LTD

1800 335 623

www.delmade.com.au
info@delmade.com.au

7 Roxford Avenue, Westbury, Tas, 7303