



MULTICUT 650 PROLINE **FEATURES**



PREMIUM LONG LIFE DRIVESHAFTS

BUILT IN SHOCK ABSORBERS

HYDRAGAS SUSPENSION

FULL WIDTH WALKING AXLES

LED LIGHT KIT

FULL WIDTH FRONT & REAR SAFETY CHAINS

HEAVY DUTY WIDE INDUSTRIAL TYRES

UNIVERSAL DRAWBAR FOR HIGH OR LOW TOWING

ADJUSTABLE LEVELLING TIE BARS

HYDRAULIC WING LIFT & SUPPORT

MECHANICAL WING FLOAT SUPPORT

REINFORCED MEGA STRENGTH SMOOTH DECK

FULL LENGTH SIDE SKIDS

SPEARHEAD
MULTICUT **650**
PRO-LINE

UNIT OPTIONS



TRACTOR HP

120hp



PTO SPEED

1000rpm



TRANSPORT WIDTH

2.70m / 8' 11"



CUTTING WIDTH

6.28m / 15' 11"



GEARBOX RATING

250hp & 165hp



NUMBER OF WHEELS

8



NUMBER OF ROTORS

5



NUMBER OF BLADES

30



CUTTING HEIGHT

25mm - 210mm
1" - 8' 1/4"



6, 8 or 21 SPLINE PTO



SWIVEL TOWING EYE



K80 TOWING HITCH




FRONT FLAP KIT



FRONT GUIDE WHEEL KIT

MULTICUT 650 PROLINE HIGH OUTPUT WITH THE CLEANEST FINISH

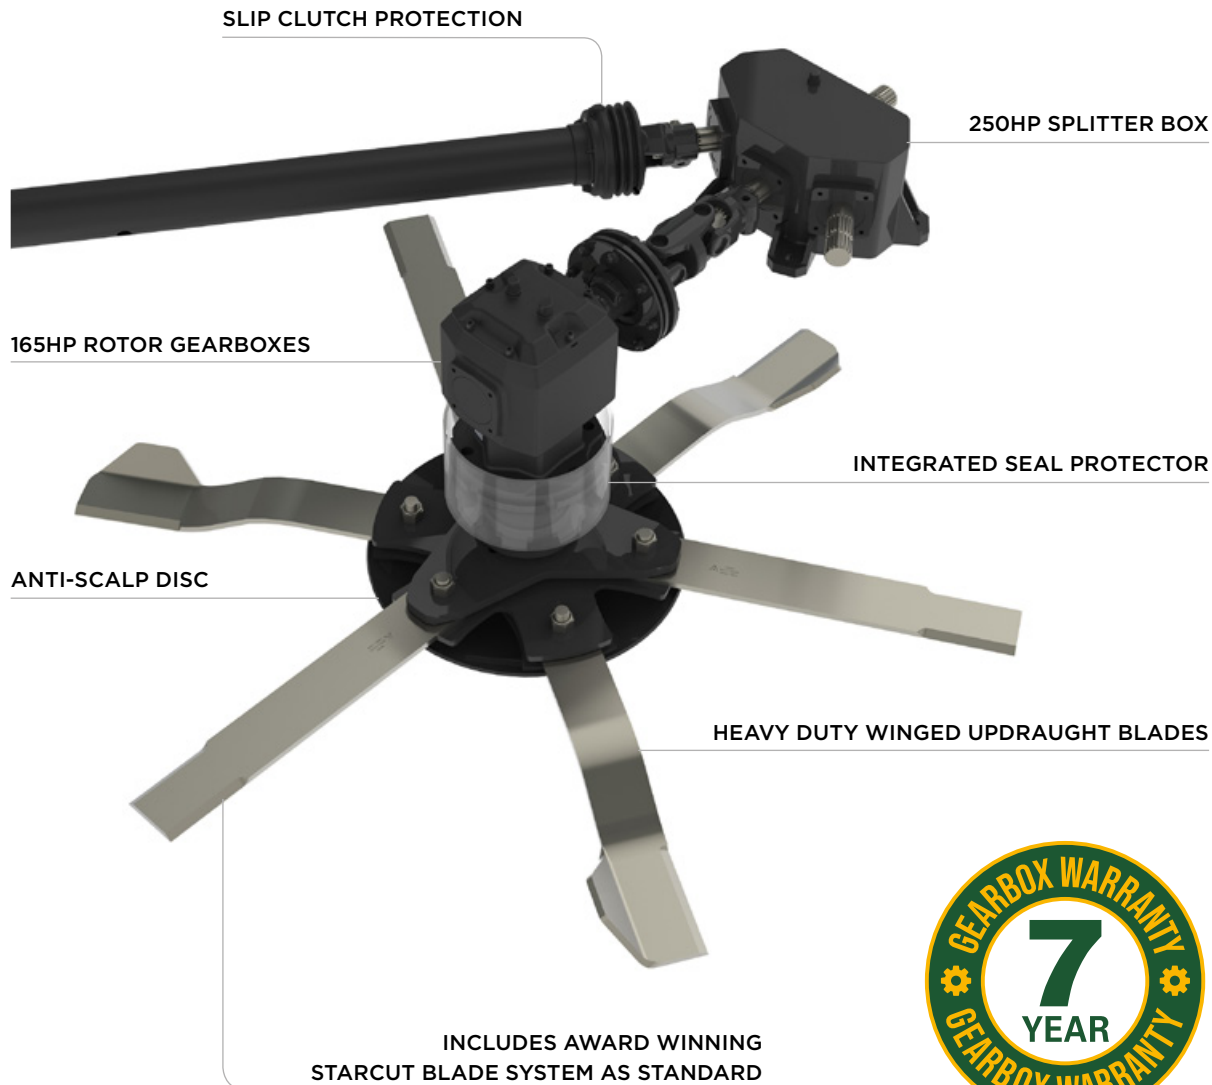

The Multicut 650 PROLINE is boosted with additional output capability, enabling the comfortable clearance of more than 8 hectares per hour.

A walking axle design is standard across the full width of the machine delivering exceptional ground contour following and reduced shock loading in harsh field conditions.

Wider wheels are also fitted to add additional comfort and improved performance.

Spearhead's renowned durability is built into this mower and the evenness of spread from the five rotors is unrivalled leaving a clean finish and high output unmatched by competitive three rotor machines of the same width.

With a six gearbox driveline with more power than previously, with complete slip clutch protection on all driveshafts, the Multicut 650 PROLINE is designed to withstand the most demanding of work environments with exceptional reliability and durability certified with Spearhead's extended 7 year gearbox warranty whilst allowing enhanced forward speeds and fuel efficiency.



STANDARD SPECIFICATION

MULTICUT 650 PROLINE

Machine weight*	3300kg / 7275lbs
Hitch	Multi-positional drawbar
Cutting width	6.28m / 20' 7"
Working machine width	6.47m / 21' 3"
Transport machine width	2.70m / 8' 11"
Maximum working length	5.07m / 16' 8"
Transport length	4.93m / 16' 3"
Deck height**	0.23m / 9"
Transport height	2.90m / 9' 7"
Cutting height	25mm - 210mm (1" - 8 1/4")
Cutting capacity	100mm / 4"
Recommended tractor HP	90hp / 67kW
Wing working angles	45° up / 15° down
Power take-off speed	1000rpm
Gearbox [splitter]	Cast Iron housing
Gearbox [rotor gearboxes (x5)]	Cast Iron housing
Input shaft	1-3/8" Z21 or Z6 SFT 8 tractor end
Gearbox lubricant [splitter]	EP80-90W or GL-4 / GL-5 oil
Gearbox lubricant [rotor]	85W-140 oil
Gearbox oil capacity [splitter gearbox]	2.7 litres / 4.7 pints
Gearbox oil capacity [centre + inner rotor gearboxes (x3)]	4.3 litres / 7.6 pints

Gearbox oil capacity [outer rotor gearboxes (x2)]	4.3 litres / 7.6 pints
Deck construction	All welded construction
Deck material thickness	6mm (1/4")
Side skirt material thickness	5mm (3/16")
Skid construction	Replaceable bolt on skid shoes
Anti-scalp dish [centre rotor + inner wing rotors]	6mm (1/4") round pan with blade holder bar
Anti-scalp dish [outer wing rotors]	5mm (3/16") round pan with blade holder bar
Blades (x15)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging high lift - low friction
Blades Starcut (x15)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging - low friction. Non-handed.
Blade tip speed (1000rpm)	79mps / 15551fpm
Driveline	ASAE Category 6
Driveline protection	2/4-way slip clutches on rotor gearboxes. Overrun on input shaft
Tailwheel mount assemblies	Tubular welded walking axles
Tailwheels (x8)	21x9 14 PLY pneumatic tyre with steel rim
Front guard	Single chain guards on each deck
Rear guard	Single chain guards on each deck

* With front and rear single chain guards ** Underside of deck to skid

MULTICUT 650 FLEX WING SLASHERS

The extra output Multicut 650 folding wing mower sets the standards in cutting performance with a total of 15 heavy duty cutting blades as standard ensuring the finest chop in fine grasses through to light scrub.

The evenness of spread from the five rotors is unrivalled leaving a clean finish and high output unmatched by competitive three rotor machines of the same width.

With a six gearbox driveline, each with slip clutch protection, the power is evenly spread to deliver exceptional reliability and durability. The high output 6.2 metre cutting width enables over 6 hectares per hour to be cleared and the compact 2.8 metre transport width ensures that transport between sites is safe and efficient.


- 6.2 metre cutting width
- 90hp minimum tractor power requirement
- Heavy duty 250hp input gearbox
- Heavy duty 116hp and 111hp rotor gearboxes
- Slip clutch protection
- 8 pneumatic rear wheels
- Anti-scalp rotor protection dishes
- 15 x heavy duty cutting blades (3 per rotor)
- Floating wings
- Rear lighting kit

Model	Working Width	Weight	HP (Min.)	Rotors
Multicut 650 Pro-line	6.2m (20'4")	2850 kg	90	5



DELMADE PTY LTD

Shaping the Land

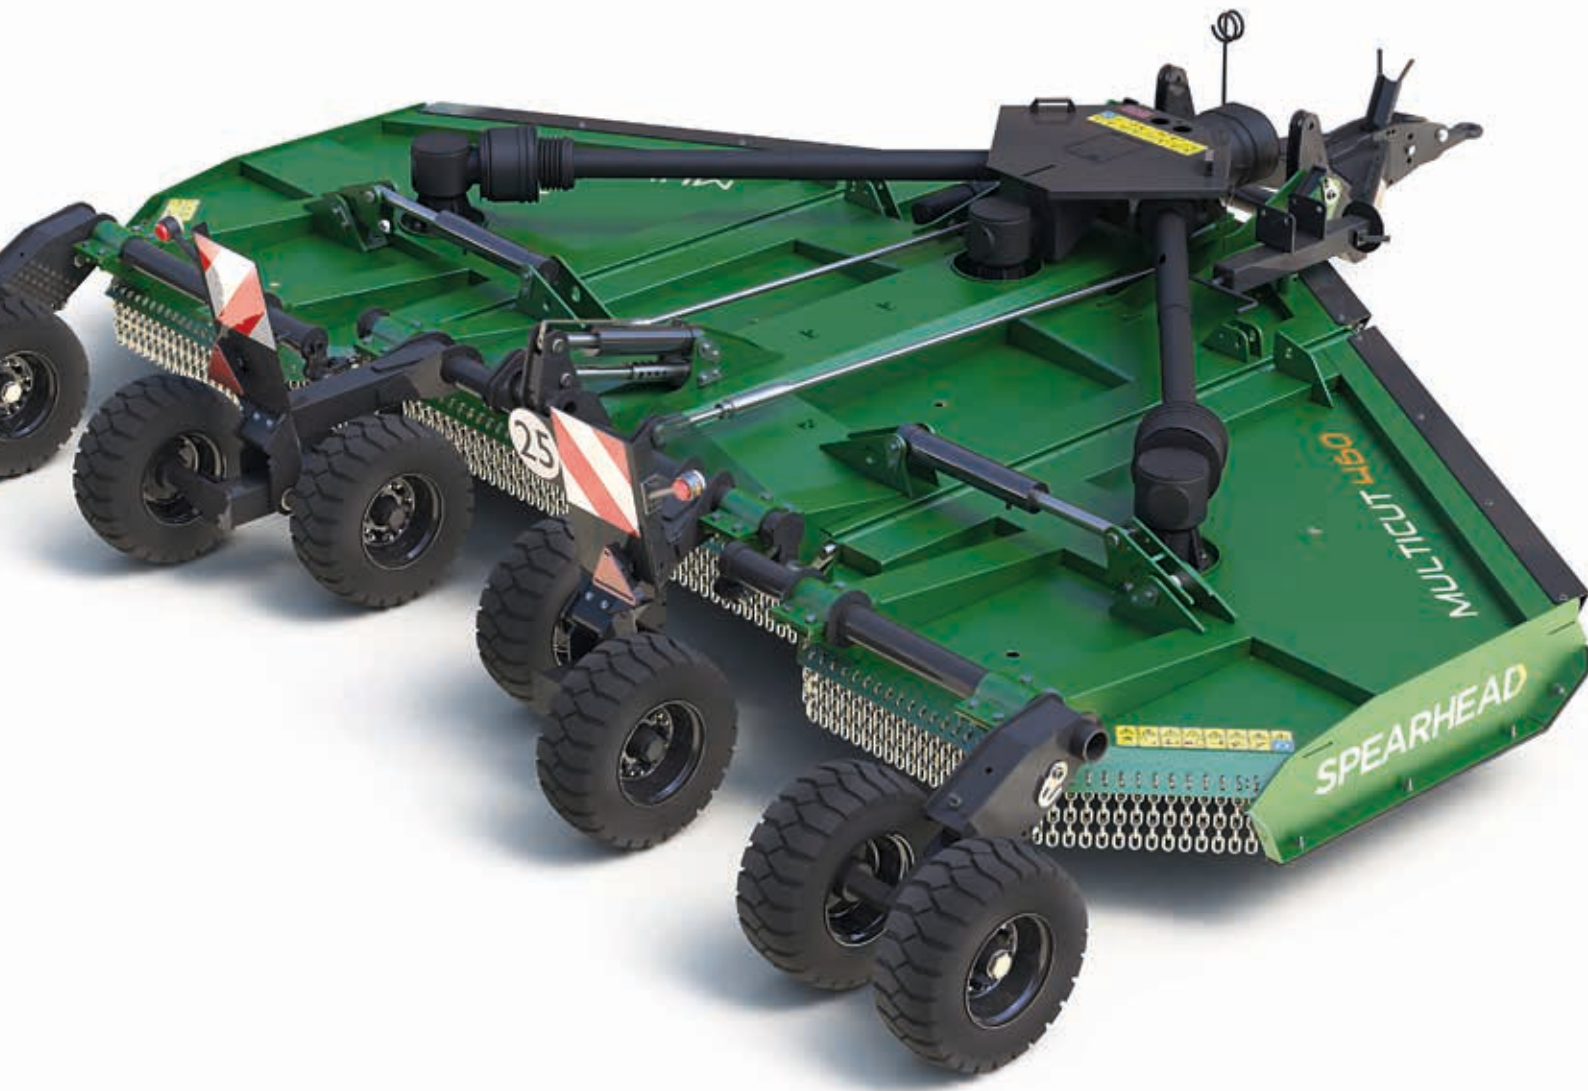

1800 335 623

7 Roxford Ave Westbury TAS 7303

www.delmade.com.au

DELMADE PTY LTD

Shaping the Land